



Description and Features

The GI10 is a passive piezoelectric AE sensor with very low frequency response, all-metal shell features makes it reliable and could be buried in the ground for long-term monitoring.

Technical Specs

Frequency Range	1Hz-15kHz
Sensitivity Peak Ref V/(m/s)	>80dB
Integral preamplifier	26dB5V
Preamp. Impedance	50 Ω
Working Temp.	-20 to 50°C
Size (DxH)	38.5×85mm
Weight	720 g
Case Material	SUS-304
Face Material	SUS-304
Protecting Grade	IP68
Connector	BNC on integral cable
Connector Location	Top

Applications



This sensor could be used underground for monitoring geologic structures like slope and for detecting buried pipelines. It also could be used for monitoring leakage and corrosion of the bottom of storage tanks or valves.

Standards




Calibration standard	ISO12714
	GB/T 19801

Accessories

Signal cable model	SYV-50-3/ STYV-50-2
Hold-down	Self-magnetic

AE SENSOR CALIBRATION CERTIFICATE

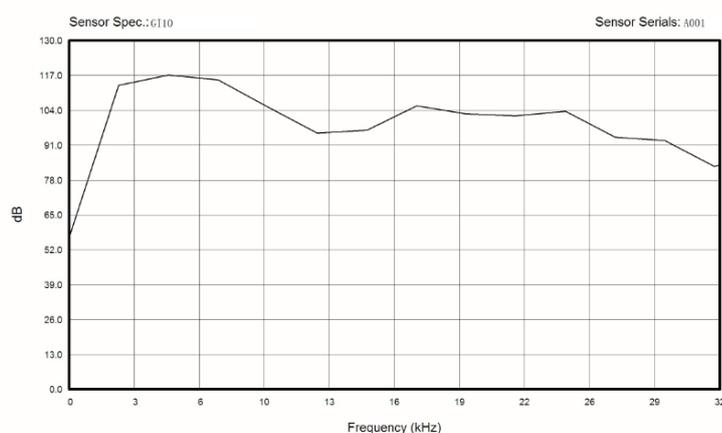

Certification



QingCheng AE Institute (Guangzhou) Co., Ltd

Website: www.aendt.com **Tel:** +86-20-32290092 **E-mail:** sales2@ae-ndt.com **Skype:** Jessicajia

Address: Room 601-9, Building 3, 232 Kezhu Road, Huangpu District, Guangzhou City, Guangdong Province, CHINA